


PERIFLO

ChemTUFF Peristaltic Pump

CT-13 Model

Performance Curve

GPH

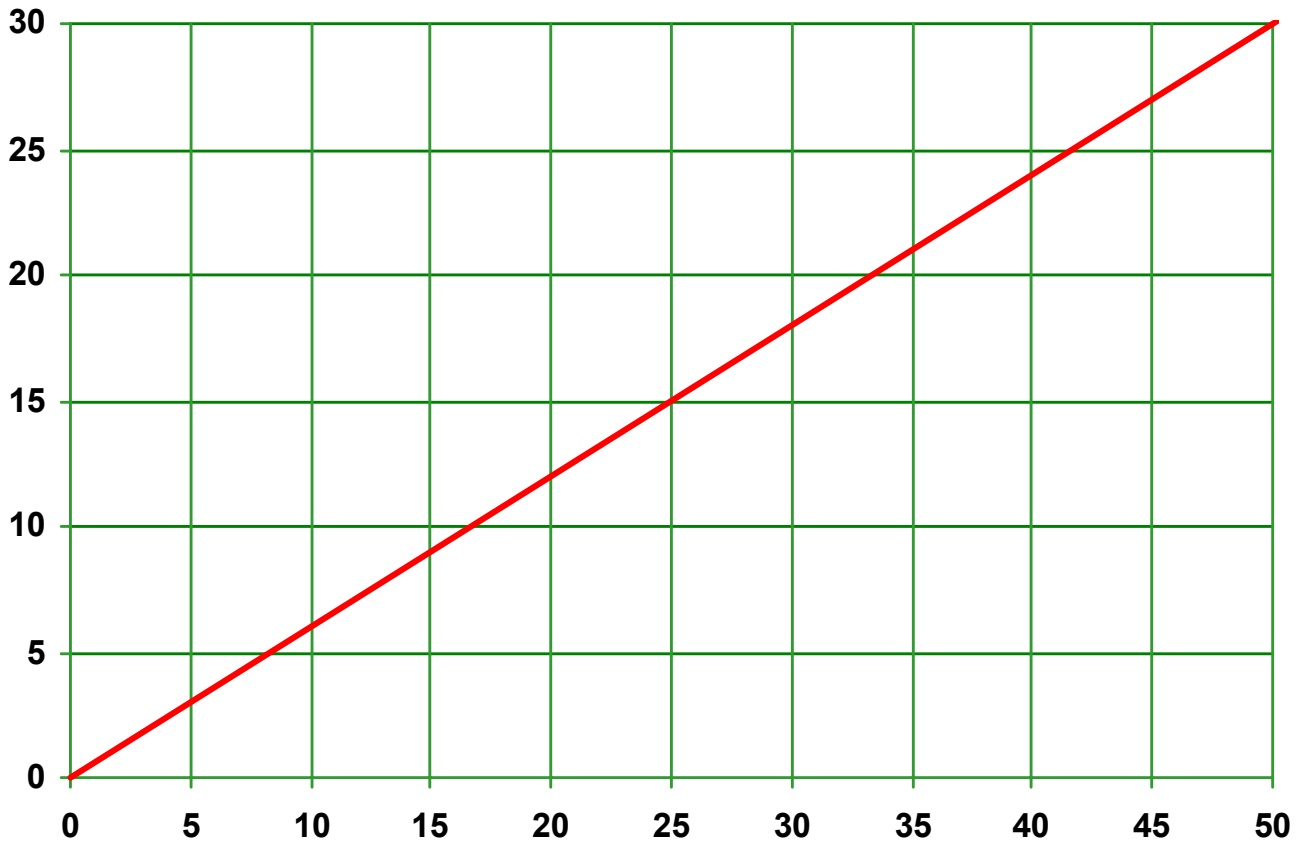

Displacement: .010 gal/rev.

RPM

Maximum Pressure for Continuous Duty	
RPM	PSI
46	116

HP Required at Max. RPM	
RPM	HP
46	0.25

* Maximum Operating Pressure for Reinforced Rubber Hoses = 115 psi

* Maximum Operating Pressure for Norprene or Tygon Tubing = 30 psi